

BP700

Two-Tone Purses (Pk/12)

MORE IDEAS...



Additional lacing may be threaded onto each side of the purse to make it into a necklace or a key chain.



Use your new purse to hold sewing supplies - a needle and thread for small sewing repairs.!

MAKING IT EASY to **SAVE MORE** on your next order!

\$10 OFF
Your Next Order of
only **\$39⁰⁰** or more.

Please mention Offer Code: **M2467**

Minimum order \$39 excludes shipping and taxes.

Limit one per order.

May not be combined with other offers
or bid or contract pricing.

See current S&S® catalog or Help at
swww.com for Offer Terms and Conditions.

We reserve the right to terminate this
offer at any time without notice.

S&S Worldwide

© Copyright 2012 S&S® Worldwide Inc. All rights reserved. No part of
this project may be copied or duplicated without the express written
permission of S&S Worldwide.

Reorder Number

BP700

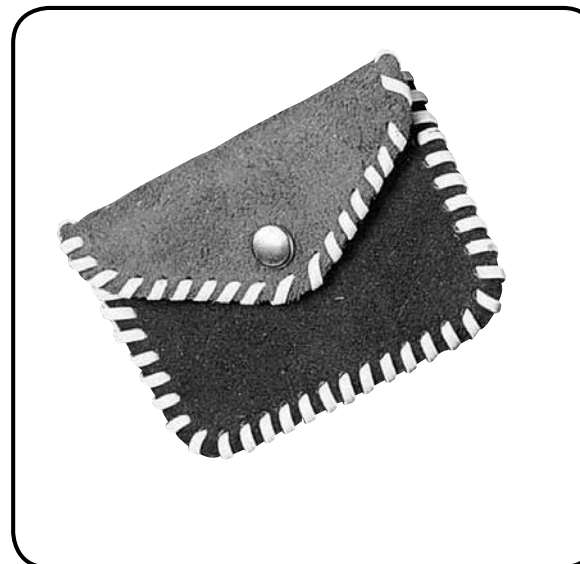
1.2

S&S Worldwide
MAKING IT EASY
to Help People Play and Learn



Two-Tone Purses (Pk/12)

PLEASE READ ALL INSTRUCTIONS BEFORE STARTING



YOUR KIT CONTAINS:

- Vinyl Purse Pieces
- Lacing Cord

AGE GROUP: 8 and up

PROJECT TIME: 45 minutes

Call Toll-Free
1-800-243-9232

Online:
SSWW.COM



Customer Service:
1-800-937-3482

Email:
cservice@swww.com

FAX:
1-800-566-6678

INSTRUCTIONS:**Helpful Hints:**

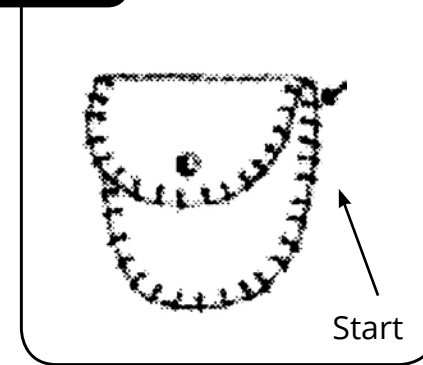
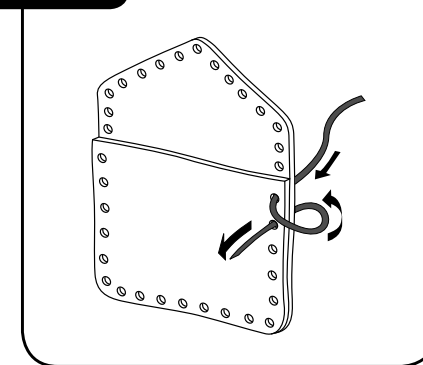
Cut one end to a long point for the working end. This will make it easier to lace through the holes.

When lacing, make sure that the lace does not twist. If lace should twist, run lace between the thumb and finger from the project down to the end.

Pull lace snug, using the same amount of tension on each stitch. When going around corners, lace twice in corner hole.

Whip Stitch: Requires approximately 3 inches of lacing for every inch of edge to be laced.

1. Line up your project, holding it with the front facing toward you. Start lacing at the least noticeable place (see Figure A).
2. At the starting hole, push lacing through from front to back leaving a 1" tail. Continue by bringing working end over and through the next hole (see Figure B).
3. Finish by pushing working-end through the starting hole. Then from in between the parts, pull both the tail and the working end out and run them under several stitches. Cut off extra lace (see Figure C).

FIGURE A**FIGURE B****FIGURE C**