

# General Wood Instructions

## Sanding

The rule of sanding is "Never across the grain".

1. Do not tear sandpaper. If you do, the ragged edges will often scratch the wood surface.
2. For flat surfaces, wrap a piece of sandpaper around a block of wood or use a store bought holder. Start with a coarse grade of paper and finish with a fine grade of paper(not included).
3. Be consistent. Do not sand one area with fine and another with coarse grade.

## Staining

1. Be sure the wood surface is smooth and clean. Stains can accentuate any roughness or scratches of cross grain sanding. Wipe off any dirt or dust with a soft cloth.
2. A base coat of sealer/primer and a light sanding before applying stain will insure a uniform stain.
3. Apply stains in one direction following the wood grain. Use a soft brush or foam brush. Let the stain penetrate the wood, then wipe off excess stain with a soft cloth.
4. If stain looks too dark, dampen the cloth with water/thinner and wipe until you achieve the desired color. If stain is too light, let dry, then apply another coat of stain and wipe off.

## Finishes

1. Outdoor projects may be finished with polyurethane or varnish.

**These are toxic and must be used in a well ventilated area.** Indoor projects may be finished with decoupage or left unfinished.

## Safety First!

This Product May Contain Silicon Gel Packets.  
**REMOVE PRIOR TO USE!**

**Jet Liner Item# WD3205**

**S&S**<sup>®</sup>Worldwide

**CALL TOLL-FREE 1-800-243-9232**

or **Mail Your Order** to: S&S Worldwide  
PO Box 513

Colchester, CT 06415-0513

FAX #: 1-800-566-6678

Customer Service: 1-800-937-3482

Internet home page address: <http://www.ssw.com>


Email address: [service@ssww.com](mailto:service@ssww.com)

Item No. WD3205

Made in China

## Jet Liner

**PLEASE READ ALL INSTRUCTIONS BEFORE STARTING**

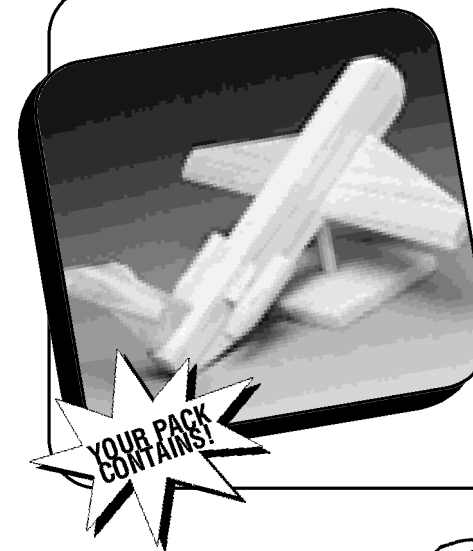

- Wooden Pieces
- Wooden Dowels
- Sandpaper
- Instructions

**YOU WILL NEED...**



Paint or Stain

Wood Glue


Brushes

Protected Work Surface

**S&S**<sup>®</sup>Worldwide



## Product Instructions:

- 1▶ Check all parts for proper placement. For best results, sand and paint before assembly, avoiding areas to be glued.
- 2▶ Glue where you see this symbol: 
- 3▶ Sand wings (A), elevator (B) and stabilizer (C) to shape.
- 4▶ Sand nose of fuselage (D) for proper contour.
- 5▶ Glue elevator (B) to stabilizer (C). Let dry.
- 6▶ Glue wings (A) to fuselage (D).
- 7▶ Once dry, glue rudder assembly (B, C) to rear of fuselage (D).
- 8▶ Glue each engine (E) to 1 pylon (F).
- 9▶ Insert and glue dowel (G) into hole of base (H).
- 10▶ Glue 1 engine assembly (E, F) to each side of fuselage (D).

Do not glue your new jet liner to its base so you can play with it.

### FIGURE A

